

Model 2000 Control Valves

Technical Sales Bulletin



Figure 1 Dyna-Flo Model DF2000 with DFC Actuator

The Model DF2000 Control Valves are heavy duty globe style control valves used in all kinds of demanding oil and gas applications, from well head to gas plant and beyond.

The Model DF2000 control valves are post guided, single port valves that can be used for either throttling or on-off control of either liquids or gasses.

The actuator for the Model DF2000 valve is typically a Dyna-Flo model DFC or DFO linear actuator. These heavy duty actuators are spring return diaphragm style, and can be used with or without a valve positioner.

The Model DF2000 control valves are manufactured to a high level of quality specifications to ensure superior performance and customer satisfaction.

Features

Configuration

Globe valve with screwed-on bonnet, unbalanced, post-guided valve plug, screwed-in metal seat ring construction, and push-down-to close valve plug action.

Low Temperature Construction Standard

Grade LCC low temperature steel, rated to -50°F (-45°C), is standard for the valve body and bonnet.

Severe Service Capable

Constructions are available for service in very erosive applications using a valve plug with a tungsten carbide tip and a seat ring with a full-bore tungsten carbide insert.

Valve Sizes and Flange Ratings

The Model DF2000 is available in a 1" and 2" body size, with NPT, RF, or RTJ end connections, in ASME Class 150-2500.

Easy Maintenance

The screwed bonnet/body joint, and seat ring allow repair or maintenance with a minimum of tools.

Shut Off Capability

The standard shut off classification is ASME/ FCI Class IV. Class V is a readily available option.

Superior Construction

The latest in CNC manufacturing and the heavy duty design positively align the valve plug in the seat ring for high pressure drop applications.

NACE Service Capability is Standard

The standard construction materials comply with the recommendations of the National Association of Corrosion Engineers (NACE) MR0175, 2002.



Model 2000 Control Valves

Technical Sales Bulletin

SPECIFICATIONS

Valve Size, Flange Ratings, and Connections

Size: 1" and 2" (Globe and Angle Body).
Rating: ASME 150/300/600/900/1500/2500.
Connections: RF / RTJ / NPT.

Rated Inlet Pressure and Temperature

Per ASME B16.34
Also see Table 1.

Maximum Allowable Pressure Drops (See Tables 18 & 19)

Flow-to-open: Capable of full rated pressure drops.
Flow-to-close: For more information contact your Dyna-Flo Sales Office.

Material Temperature Capabilities

LCC body (standard): -50 to 450°F (-45 to 232°C).
CF8M body: -150 to 700°F (-101 to 371°C).

Construction Materials

See Figure 2 for valve diagram and keys.
See Table 17 for construction materials.

Dimensions

Valve and Actuator assembly diagram - See Figure 3.
Valve and Actuator assembly dimensions - See Tables 3 - 7.

Flow Direction

Typically up through seat ring and out past valve plug.

Flow Characteristic

Dyna-Form Equal Percent
Dyna-Flute 1 Flute (Equal Percent)
Dyna-Flute 3 Flute (Equal Percent)

Port, Yoke Boss Diameter, Stem Diameters, and Travel

See Table 20.

Valve Sizing Coefficients

Maximums by port size (Cv) - Globe Body

- 1/4" 1.64
- 3/8" 4.03
- 1/2" 6.82
- 3/4" 14.00
- 1" 23.70
- 1-1/4" 34.50

Detailed - See Tables 8 - 16.

Valve Body and Actuator

Approximate Weights - See Table 11.

Options

- Trim in Tungsten Carbide.
- Anti-corrosion coating of internal body passage.
- Live loaded low emission packing.

For more information and other options contact your Dyna-Flo sales office.

Model 2000 Control Valves

Technical Sales Bulletin



Table 1

Rated Inlet Pressure and Temperature						
Valve Size	Body Type	Class ^o	Temperature		Maximum Pressure	
			°F	°C	Psi	kPa
1 and 2 Inch	NPT	3750* (1500 ASME)	100	38	3,750	25,855
			450	232	3,425	23,615
		6250* (2500 ASME) (2" Body Only)	100	38	6,250	43,092
			450	232	5,710	39,369
	Flanged	150 ASME	100	38	290	2,000
			450	232	185	1,276
		300 ASME	100	38	750	5,171
			450	232	685	4,723
		600 ASME	100	38	1,500	10,342
			450	232	1,370	9,446
		1500 ASME	100	38	3,750	25,855
			450	232	3,425	23,615
		2500 ASME (2" Body Only)	100	38	6,250	43,092
			450	232	5,710	39,369
* Indicates Working Class Pressure (Psig)			◇ Indicates Class or Cold Working Pressure Limit			

Table 2

Approximate Valve Body and Standard Actuator Assembly Weights - Pounds (Kilograms)					
DF2000	Valve Only	DFC [DFO] 1069	DFC [DFO] 2069	DFC [DFO] 2105	DFC [DFO] 2156
1 Inch NPT	25 (11)	73 (33) [65 (29)]	N/A	N/A	N/A
1 Inch 150 to 600	45 (20)	93 (42) [85 (39)]	N/A	N/A	N/A
1 Inch 900/1500	75 (34)	123 (56) [115 (52)]	N/A	N/A	N/A
2 Inch NPT	75 (34)	N/A	125 (57) [126 (57)]	165 (75) [157 (71)]	196 (89) [182 (83)]
2 Inch 150 to 600	95 (43)	N/A	145 (66) [146 (66)]	185 (84) [177 (80)]	216 (98) [202 (92)]
2 Inch 900/1500	115 (52)	N/A	165 (75) [166 (75)]	205 (93) [197 (89)]	236 (107) [222 (101)]
2 Inch 2500	115 (52)	N/A	165 (75) [166 (75)]	205 (93) [197 (89)]	236 (107) [222 (101)]



Model 2000 Control Valves

Technical Sales Bulletin

Table 3

Model DF2000 Globe Body Dimensions - Inch (mm)

Valve Size	End Conneciton	A	C
1 Inch	NPT ASME 1500	6.62 (168)	1.81 (46)
	150# RF	8.12 (206)	1.81 (46)
	300# RF	8.62 (219)	1.81 (46)
	300# RTJ	9.12 (232)	1.81 (46)
	600# RF	9.12 (232)	1.81 (46)
	600# RTJ	9.12 (232)	1.81 (46)
	900# and 1500# RF	10.00 (254)	1.81 (46)
	900# and 1500# RTJ	10.00 (254)	1.81 (46)
2 Inch	NPT ASME 1500	9.00 (229)	1.81 (46)
	NPT ASME 2500	10.50 (267)	3.25 (83)
	150# RF	10.50 (267)	2.75 (70)
	300# RF	10.50 (267)	2.75 (70)
	600# RF	11.25 (286)	2.75 (70)
	600# RTJ	11.38 (289)	2.75 (70)
	900# and 1500# RF	12.12 (308)	2.75 (70)
	900# and 1500# RTJ	12.25 (311)	2.75 (70)
	2500# RF	15.38 (391)	3.25 (83)
	2500# RTJ	15.50 (394)	3.25 (83)
3 Inch X 2 Inch	150# RF	11.75 (299)	2.75 (70)
	150# RTJ	12.25 (311)	2.75 (70)
	300# RF	12.50 (318)	2.75 (70)
	300# RTJ	13.12 (333)	2.75 (70)
	600# RF	13.25 (337)	2.75 (70)
	600# RTJ	13.38 (340)	2.75 (70)
	900# RF	17.38 (441)	2.75 (70)
	900# RTJ	17.50 (445)	2.75 (70)
	1500# RF	18.13 (461)	2.75 (70)
	1500# RTJ	18.25 (464)	2.75 (70)
	2500# RF	19.62 (498)	3.25 (83)
	2500# RTJ	19.88 (505)	3.25 (83)

Refer to Figure 3 Valve Actuator Schematic

Model 2000 Control Valves

Technical Sales Bulletin



Table 3 - Continued

Model DF2000 Globe Body Dimensions - Inch (mm)

Valve Size	End Conneciton	A	C
4 Inch X 2 Inch	150# RF	13.88 (353)	2.75 (70)
	150# RTJ	14.38 (365)	2.75 (70)
	300# RF	14.50 (368)	2.75 (70)
	300# RTJ	15.12 (384)	2.75 (70)
	600# RF	15.50 (394)	2.75 (70)
	600# RTJ	15.62 (397)	2.75 (70)
	900# RF	20.12 (511)	2.75 (70)
	900# RTJ	20.25 (514)	2.75 (70)
	1500# RF	20.88 (530)	2.75 (70)
	1500# RTJ	21.00 (533)	2.75 (70)
	2500# RF	22.62 (575)	3.25 (83)
	2500# RTJ	23.00 (584)	3.25 (83)

Refer to Figure 3 Valve Actuator Schematic


Table 4

Globe Body Valve Dimensions (Refer to Figure 3)

Valve		B		
Size (Inch)	End Connection (ASME Class)	Stem Diameter inch (mm)		
		3/8 (9.5)	1/2 (12.7)	3/4 (19.1)
1	NPT (1500)	6.80 (173)	7.19 (183)	---
2	NPT (1500 & 2500)	---	8.53 (217)	8.25 (210)
1	RF & RTJ (150-600)	6.80 (173)	7.19 (183)	---
2	RF & RTJ (150-600)	---	8.53 (217)	8.25 (210)
1	RF & RTJ (900-1500)	6.80 (172)	7.19 (183)	---
2	RF & RTJ (900-1500)	---	8.53 (217)	8.25 (210)
2	RF & RTJ (2500)	---	8.53 (217)	8.25 (210)

Model 2000 Control Valves

Technical Sales Bulletin

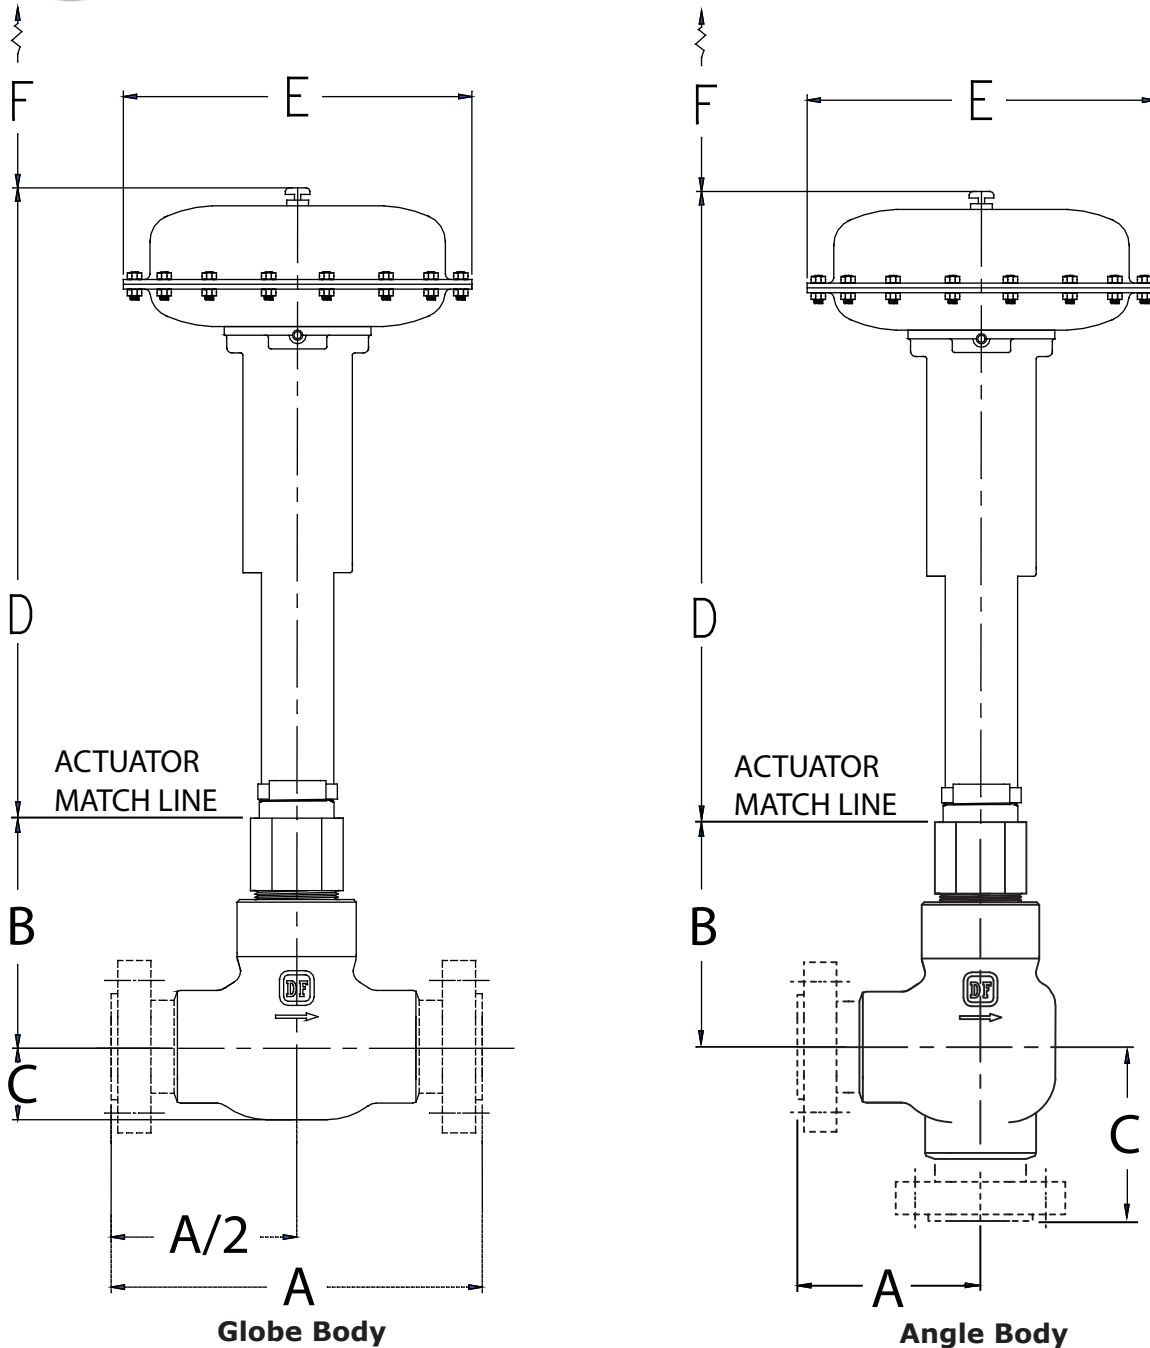

Note: Valve with or without flanges. Model DFC Actuator Shown

Figure 2 Valve Actuator Schematic (Refer to Tables 13-17)

Model 2000 Control Valves

Technical Sales Bulletin



Table 5

Angle Body Dimensions - Inch (mm)

Valve Size	End Conneciton	A	C
1 Inch	NPT ASME 1500	3.00 (76)	3.50 (89)
	300# RF	4.31 (109)	4.31 (109)
	300# RTJ	4.56 (116)	4.56 (116)
	600# RF	4.56 (116)	4.56 (116)
	600# RTJ	4.56 (116)	4.56 (116)
	900# and 1500# RF	5.00 (127)	5.00 (127)
	900# and 1500# RTJ	5.00 (127)	5.00 (127)
2 Inch	NPT ASME 1500	4.00 (102)	4.88 (124)
	NPT ASME 2500	4.50 (114)	5.12 (130)
	300# RF	6.12 (155)	6.12 (155)
	300# RTJ	6.44 (164)	6.44 (164)
	600# RF	6.50 (165)	6.50 (165)
	600# RTJ	6.56 (167)	6.56 (167)
	900# and 1500# RF	7.00 (178)	7.00 (178)
	900# and 1500# RTJ	7.06 (179)	7.06 (179)
	2500# RF	7.69 (195)	7.69 (195)
	2500# RTJ	7.75 (197)	7.75 (197)

Refer to Figure 3 Valve Actuator Schematic

Table 6

Angle Body Valve Dimensions (Refer to Figure 3)

Valve		B		
Size (inch)	End Connection (ASME Class)	Stem Diameter inch (mm)		
		3/8 (9.5)	1/2 (12.7)	3/4 (19.1)
1	NPT (1500)	5.25 (133)	6.00 (152)	5.50 (140)
2	NPT (1500 & 2500)	---	6.38 (162)	6.19 (157)
1	RF & RTJ (150-600)	5.31 (135)	6.06 (154)	5.56 (141)
2	RF & RTJ (150-600)	---	6.44 (164)	6.25 (159)
1	RF & RTJ (900-1500)	5.31 (135)	6.06 (154)	5.56 (141)
2	RF & RTJ (900-1500)	---	6.44 (164)	6.25 (159)
2	RF & RTJ (2500)	---	6.44 (164)	6.25 (159)



Model 2000 Control Valves

Technical Sales Bulletin

Table 7

Model DFC and DFO Outline Dimensions - Inch (mm)

Actuator Size	D		E	F
	DFC	DFO		
1069	22.68 (576)	19.25 (489)	13.12 (333)	5.00 (127)
2069	23.38 (594)	21.20 (538)	13.12 (333)	6.88 (175)
2105	30.25 (768)	25.72 (653)	16.00 (406)	6.88 (175)
2156	30.25 (768)	25.72 (653)	18.62 (473)	6.88 (175)
3105	30.91 (785)	28.10 (714)	16.00 (406)	9.12 (232)
3156	30.91 (785)	28.10 (714)	18.62 (473)	9.12 (232)
3220	36.48 (927)	32.69 (830)	21.10 (536)	9.12 (232)

Table 8

Globe Body Dyna-Flute 1 Flute (Equal Percent) Trim - Flow Up Valve Sizing Coefficients

1 and 2 Inch Valves - Total Travel 3/4 Inch (19 mm)

Percentage of Valve Travel

Port Size	Coefficient	Percentage of Valve Travel									
		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
1/4 Inch 6.4 mm	C_V	0.0385	0.0454	0.0560	0.0717	0.0941	0.124	0.160	0.212	0.277	0.354
	X_T	0.778	0.734	0.690	0.651	0.640	0.635	0.637	0.634	0.632	0.656
	F_L	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87

Relationships of Note: $C_1 = 39.76 \sqrt{X_T}$ $C_G = C_V C_1$ $K_M = F_L^2$

Table 9

Globe Body Dyna-Flute 3 Flute (Equal Percent) Trim - Flow Up Valve Sizing Coefficients

1 and 2 Inch Valves - Total Travel 3/4 Inch (19 mm)

Percentage of Valve Travel

Port Size	Coefficient	Percentage of Valve Travel									
		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
1/4 Inch 6.4 mm	C_V	0.0562	0.0725	0.100	0.146	0.216	0.312	0.433	0.588	0.802	1.07
	X_T	0.692	0.648	0.639	0.625	0.600	0.586	0.597	0.613	0.620	0.624
	F_L	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90

Relationships of Note: $C_1 = 39.76 \sqrt{X_T}$ $C_G = C_V C_1$ $K_M = F_L^2$

Model 2000 Control Valves

Technical Sales Bulletin



Table 10

Angle Body Dyna-Flute 1 Flute (Equal Percent) Trim - Flow Down Valve Sizing Coefficients

1 and 2 Inch Valves - Total Travel 3/4 Inch (19 mm)

Port Size	Coefficient	Percentage of Valve Travel									
		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
1/4 Inch 6.4 mm	C_v	0.0312	0.0375	0.0470	0.0625	0.0875	0.125	0.172	0.245	0.330	0.405
	X_T	0.989	0.975	0.865	0.762	0.660	0.660	0.495	0.450	0.450	0.549
	F_L	0.79	0.79	0.79	0.79	0.79	0.79	0.79	0.79	0.79	0.79

Table 11

Angle Body Dyna-Flute 3 Flute (Equal Percent) Trim - Flow Down Valve Sizing Coefficients

1 and 2 Inch Valves - Total Travel 3/4 Inch (19 mm)

Port Size	Coefficient	Percentage of Valve Travel									
		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
1/4 Inch 6.4 mm	C_v	0.0610	0.0900	0.135	0.212	0.310	0.430	0.570	0.785	1.11	1.41
	X_T	0.670	0.518	0.385	0.313	0.295	0.305	0.325	0.325	0.311	0.380
	F_L	0.68	0.68	0.68	0.68	0.68	0.68	0.68	0.68	0.68	0.68

Table 12

Angle Body Dyna-Flute 1 Flute (Equal Percent) Trim - Flow Up Valve Sizing Coefficients

1 and 2 Inch Valves - Total Travel 3/4 Inch (19 mm)

Port Size	Coefficient	Percentage of Valve Travel									
		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
1/4 Inch 6.4 mm	C_v	0.0385	0.0454	0.0560	0.0717	0.0941	0.124	0.160	0.212	0.277	0.354
	X_T	0.778	0.734	0.690	0.651	0.640	0.635	0.637	0.634	0.632	0.656
	F_L	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87

Table 13

Angle Body Dyna-Flute 3 Flute (Equal Percent) Trim - Flow Up Valve Sizing Coefficients

1 and 2 Inch Valves - Total Travel 3/4 Inch (19 mm)

Port Size	Coefficient	Percentage of Valve Travel									
		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
1/4 Inch 6.4 mm	C_v	0.0562	0.0725	0.100	0.146	0.216	0.312	0.433	0.588	0.802	1.07
	X_T	0.692	0.648	0.639	0.625	0.600	0.586	0.597	0.613	0.620	0.624
	F_L	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90

Relationships of Note: $C_1 = 39.76\sqrt{X_T}$ $C_G = C_V C_1$ $K_M = F_L^2$



Model 2000 Control Valves

Technical Sales Bulletin

Table 14

Equal Percentage Trim (Flow Up) Valve Sizing Coefficients

1 Inch Valve

Percentage of Valve Travel

Port Size	Coefficient	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
1/4 Inch	C _v	0.08	0.115	0.164	0.224	0.315	0.45	0.641	0.921	1.28	1.64
	X _T	0.783	0.783	0.744	0.691	0.625	0.614	0.608	0.611	0.61	0.61
	F _L	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
3/8 Inch	C _v	0.155	0.260	0.407	0.596	0.858	1.21	1.65	2.22	3.00	4.03
	X _T	0.625	0.535	0.534	0.539	0.535	0.535	0.538	0.534	0.537	0.536
	F _L	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84
1/2 Inch	C _v	0.272	0.435	0.63	0.91	1.29	1.83	2.56	3.64	5.07	6.50
	X _T	0.613	0.627	0.585	0.576	0.565	0.553	0.535	0.509	0.49	0.501
	F _L	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80
3/4 Inch	C _v	0.482	0.774	1.24	1.96	2.90	4.12	5.87	8.15	10.8	12.2
	X _T	0.581	0.616	0.581	0.586	0.581	0.573	0.549	0.541	0.529	0.528
	F _L	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80

2 Inch Valve

Percentage of Valve Travel

Port Size	Coefficient	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
1/4 Inch	C _v	0.08	0.115	0.164	0.224	0.315	0.45	0.641	0.921	1.28	1.64
	X _T	0.783	0.783	0.744	0.691	0.625	0.614	0.608	0.611	0.61	0.610
	F _L	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
3/8 Inch	C _v	0.155	0.26	0.407	0.596	0.858	1.21	1.65	2.22	3.00	4.03
	X _T	0.625	0.535	0.534	0.539	0.535	0.535	0.538	0.534	0.537	0.536
	F _L	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84
1/2 Inch	C _v	0.348	0.505	0.709	0.996	1.38	1.92	2.69	3.82	5.25	6.82
	X _T	0.613	0.627	0.585	0.576	0.565	0.553	0.535	0.509	0.49	0.501
	F _L	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80
3/4 Inch	C _v	0.613	0.952	1.44	2.06	2.92	4.13	5.86	8.16	11.1	14.0
	X _T	0.581	0.616	0.581	0.586	0.581	0.573	0.549	0.541	0.529	0.528
	F _L	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80
1 Inch	C _v	1.20	1.68	2.44	3.53	5.05	7.28	10.5	14.0	18.4	23.7
	X _T	0.517	0.569	0.559	0.542	0.544	0.54	0.507	0.508	0.507	0.508
	F _L	0.82	0.82	0.82	0.82	0.82	0.82	0.82	0.82	0.82	0.82
1-1/4 Inch	C _v	1.32	1.76	2.49	3.66	5.42	8.23	12.7	20.6	28.9	34.5
	X _T	0.521	0.563	0.548	0.534	0.498	0.503	0.553	0.528	0.524	0.579
	F _L	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85

Relationships of Note: $C_1 = 39.76 \sqrt{X_T}$ $C_G = C_V C_1$ $K_M = F_L^2$

Model 2000 Control Valves

Technical Sales Bulletin



Table 15

Angle Body Equal Percentage Trim (Flow Down) Valve Sizing Coefficients

1 Inch Valve

Port Size	Coefficient	Percentage of Valve Travel									
		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
1/4 Inch	C_v	0.090	0.173	0.292	0.480	0.728	0.995	1.35	1.97	2.71	3.25
	X_T	0.576	0.379	0.270	0.200	0.155	0.144	0.148	0.130	0.128	0.151
	F_L	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45
3/8 Inch	C_v	0.190	0.343	0.625	1.03	1.45	1.85	2.45	3.80	5.56	7.07
	X_T	0.515	0.356	0.220	0.150	0.151	0.179	0.192	0.164	0.164	0.164
	F_L	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46
1/2 Inch	C_v	0.488	0.950	1.40	2.06	2.90	3.54	4.55	6.16	8.80	11.2
	X_T	0.225	0.136	0.125	0.111	0.111	0.144	0.175	0.185	0.180	0.185
	F_L	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.49
3/4 Inch	C_v	0.850	1.58	2.25	2.85	3.80	5.49	8.70	11.7	14.3	16.8
	X_T	0.195	0.140	0.167	0.238	0.288	0.291	0.242	0.260	0.316	0.370
	F_L	0.67	0.67	0.67	0.67	0.67	0.67	0.67	0.67	0.67	0.67

2 Inch Valve

Port Size	Coefficient	Percentage of Valve Travel									
		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
1/4 Inch	C_v	0.095	0.178	0.351	0.544	0.740	0.998	1.35	1.97	2.70	3.20
	X_T	0.577	0.362	0.188	0.155	0.150	0.145	0.147	0.138	0.140	0.165
	F_L	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50
3/8 Inch	C_v	0.255	0.444	0.735	1.09	1.45	1.85	2.46	3.80	5.60	7.07
	X_T	0.394	0.239	0.165	0.140	0.150	0.180	0.195	0.160	0.160	0.160
	F_L	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45
1/2 Inch	C_v	0.640	1.02	1.55	2.20	2.90	3.55	4.62	7.15	9.88	12.0
	X_T	0.265	0.195	0.160	0.145	0.145	0.167	0.180	0.165	0.165	0.165
	F_L	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46	0.46
3/4 Inch	C_v	1.04	1.70	2.22	2.86	3.82	5.50	8.70	13.1	17.3	21.2
	X_T	0.210	0.195	0.235	0.295	0.325	0.305	0.244	0.210	0.221	0.235
	F_L	0.55	0.55	0.55	0.55	0.55	0.55	0.55	0.55	0.55	0.55
1 Inch	C_v	2.05	2.91	3.60	4.30	5.70	8.70	13.0	20.0	26.7	31.8
	X_T	0.170	0.175	0.240	0.340	0.343	0.313	0.275	0.225	0.225	0.255
	F_L	0.54	0.54	0.54	0.54	0.54	0.54	0.54	0.54	0.54	0.54
1-1/4 Inch	C_v	1.70	2.30	3.30	4.70	6.75	10.5	17.5	26.0	35.0	44.8
	X_T	0.310	0.310	0.310	0.310	0.309	0.309	0.311	0.310	0.310	0.310
	F_L	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60

Relationships of Note: $C_1 = 39.76 \sqrt{X_T}$ $C_G = C_V C_1$ $K_M = F_L^2$



Model 2000 Control Valves

Technical Sales Bulletin

Table 16

Angle Body Equal Percentage Trim (Flow Up) Valve Sizing Coefficients

1 Inch Valve

Percentage of Valve Travel

Port Size	Coefficient	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
1/4 Inch	C_v	0.70	0.114	0.165	0.225	0.313	0.450	0.640	0.920	1.30	1.65
	X_T	0.785	0.785	0.745	0.693	0.625	0.615	0.610	0.612	0.611	0.612
	F_L	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
3/8 Inch	C_v	0.155	0.260	0.408	0.595	0.858	1.20	1.65	2.21	3.00	4.04
	X_T	0.625	0.535	0.535	0.540	0.535	0.535	0.536	0.532	0.535	0.535
	F_L	0.83	0.83	0.83	0.83	0.83	0.83	0.83	0.83	0.83	0.83
1/2 Inch	C_v	0.272	0.435	0.630	0.910	1.30	1.85	2.57	3.65	5.09	6.50
	X_T	0.672	0.645	0.640	0.590	0.590	0.585	0.585	0.555	0.525	0.550
	F_L	0.83	0.83	0.83	0.83	0.83	0.83	0.83	0.83	0.83	0.83
3/4 Inch	C_v	0.480	0.775	1.25	1.98	2.90	4.15	5.87	8.15	11.0	12.4
	X_T	0.570	0.600	0.525	0.472	0.490	0.520	0.536	0.505	0.485	0.630
	F_L	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92

2 Inch Valve

Percentage of Valve Travel

Port Size	Coefficient	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
1/4 Inch	C_v	0.069	0.115	0.165	0.225	0.315	0.450	0.640	0.920	1.28	1.65
	X_T	0.780	0.780	0.745	0.695	0.625	0.615	0.611	0.613	0.610	0.610
	F_L	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86
3/8 Inch	C_v	0.155	0.261	0.410	0.595	0.858	1.20	1.65	2.22	3.00	4.05
	X_T	0.625	0.533	0.533	0.540	0.535	0.534	0.536	0.535	0.536	0.536
	F_L	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84
1/2 Inch	C_v	0.347	0.505	0.710	0.990	1.37	1.90	2.70	3.81	5.25	6.80
	X_T	0.615	0.625	0.585	0.586	0.564	0.555	0.535	0.510	0.489	0.500
	F_L	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80
3/4 Inch	C_v	0.612	0.950	1.45	2.05	2.93	4.13	5.88	8.15	11.0	14.1
	X_T	0.580	0.615	0.580	0.585	0.580	0.572	0.550	0.540	0.530	0.529
	F_L	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81
1 Inch	C_v	1.20	1.70	2.45	3.52	5.05	7.26	10.5	14.0	18.5	23.5
	X_T	0.515	0.570	0.555	0.540	0.545	0.542	0.505	0.510	0.509	0.506
	F_L	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80
1-1/4 Inch	C_v	1.30	1.75	2.50	3.65	5.40	8.25	12.9	20.8	29.0	34.5
	X_T	0.520	0.560	0.550	0.535	0.496	0.502	0.555	0.528	0.524	0.577
	F_L	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87

Relationships of Note: $C_1 = 39.76 \sqrt{X_T}$ $C_G = C_v C_1$ $K_M = F_L^2$

Model 2000 Control Valves

Technical Sales Bulletin



Table 17


Model DF2000 Standard Construction Materials

Description	Material	
Body	LCC	CF8M (Optional)
Flanges	LF2	F316 (Optional)
Bonnet & Bushing Assembly	LCC	
	LF2	
	F316	
Bushing	S17400 DH1150	
Bonnet Gasket	S30400	
Lower Wiper	PTFE	
Packing Box Ring	S31600**	
Packing Set (2 Req'd)	PTFE	
Packing Spacer	S31600**	
Packing Follower	S31600**	
Packing Flange	Plated Steel	
Stem Wiper	Felt	
Packing Nut (2 Req'd)	2H	
Packing Stud (2 Req'd)	B7	
Yoke Nut	Zinc Plated Steel	
Seat Ring Gasket	S30400	
Seat Ring*	S31600** / Alloy 6	
Plug & Stem Assembly*	S31600** / Alloy 6 & S20910	


*Other Options Available. ** All S31600 barstock is dual grade S31600/S31603 (316/316L).

Model 2000 Control Valves

Technical Sales Bulletin

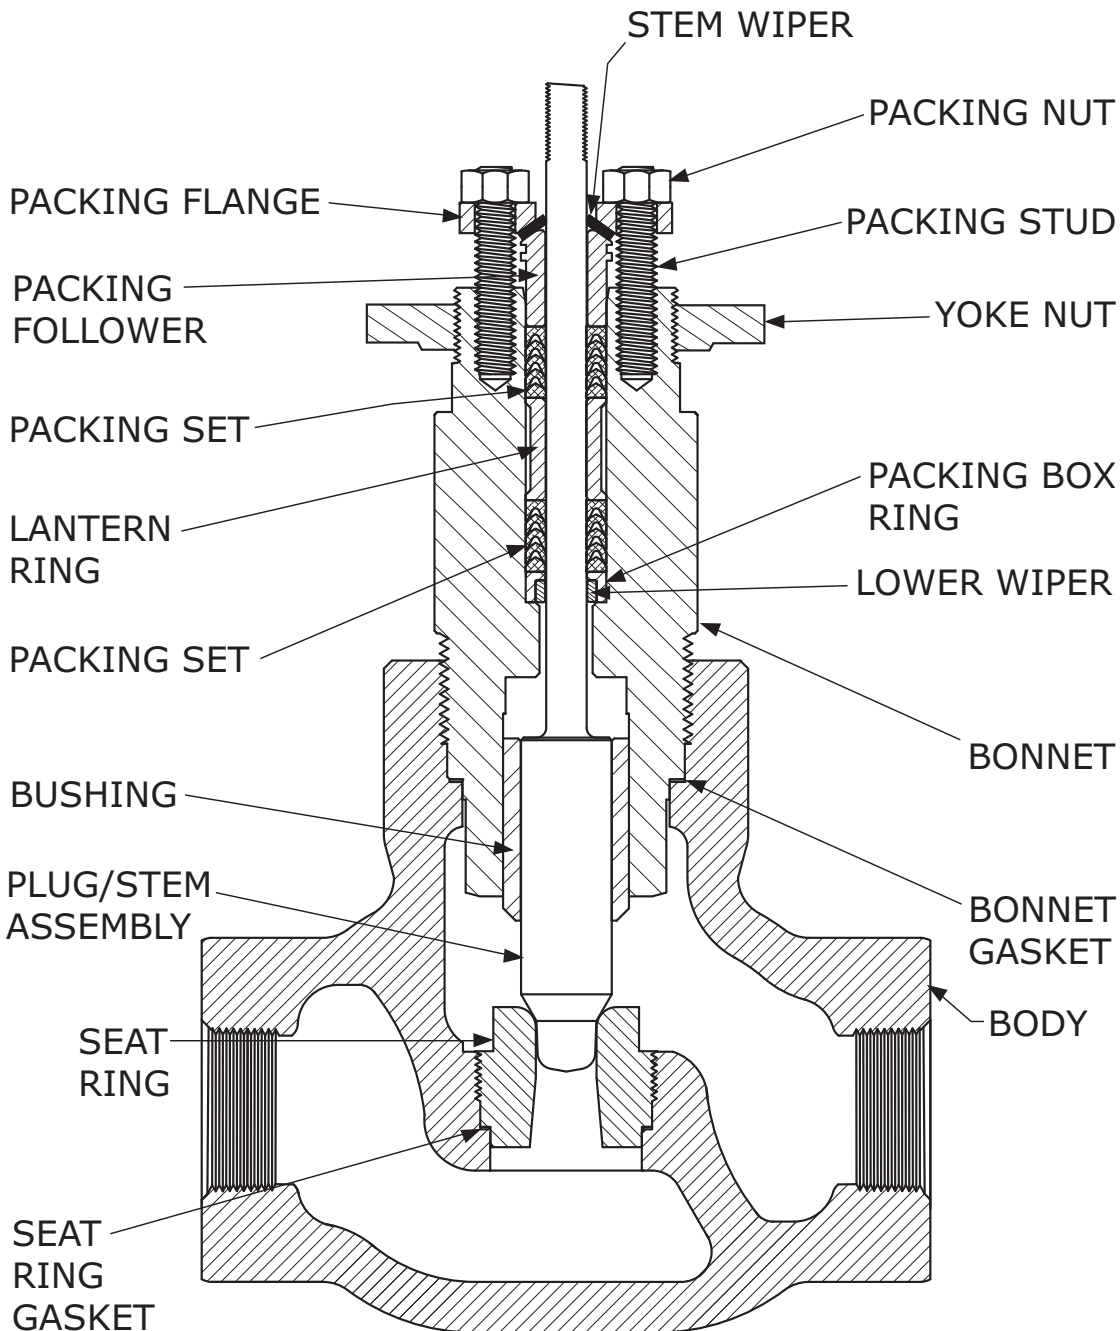

EQUAL PERCENTAGE

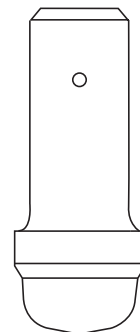

DYNA-FLUTE


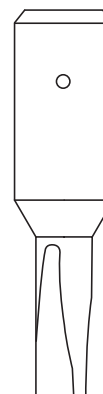


Figure 3
Valve Diagram With Keys

Model 2000 Control Valves

Technical Sales Bulletin

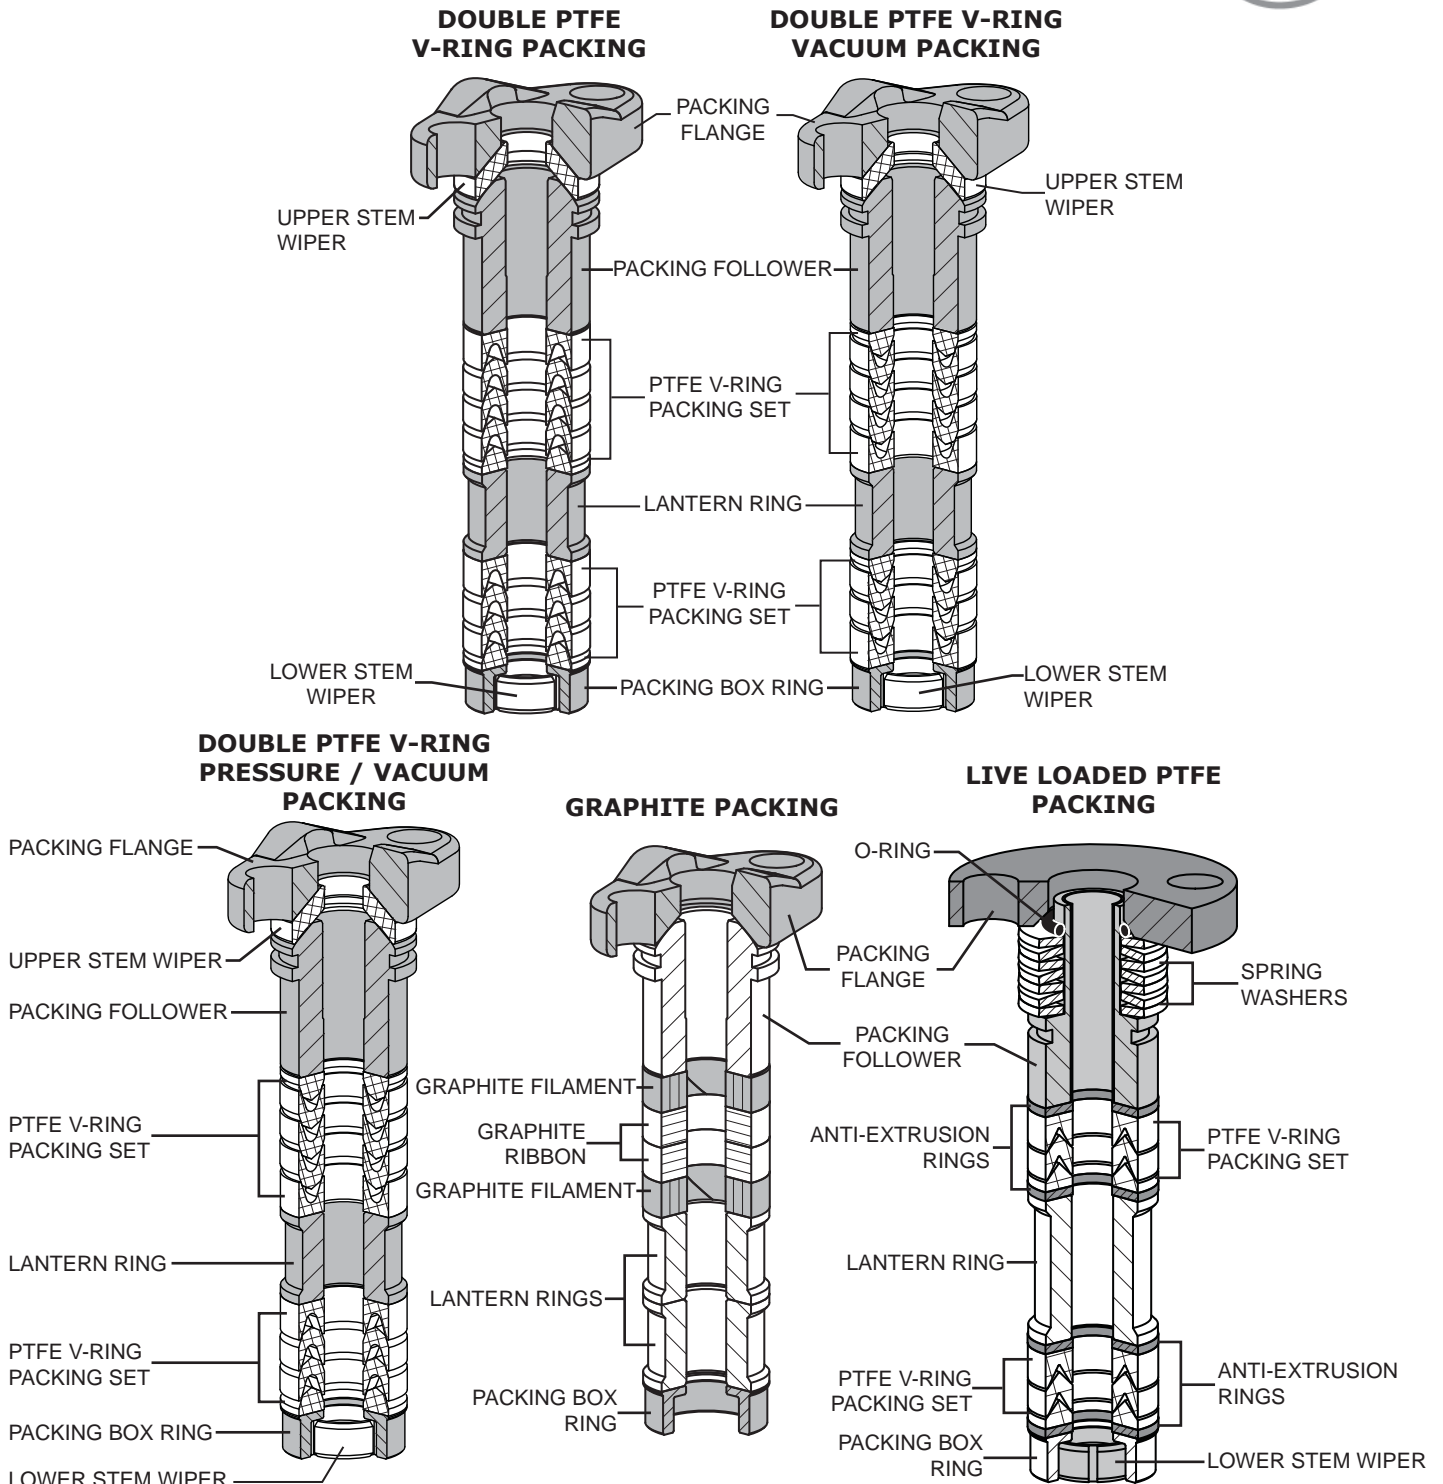


Figure 4 Typical Packing Arrangements

Model 2000 Control Valves



Table 18

Fail Closed Actuator Maximum Shut-off Capabilities with 6 to 30 psig Signal, 35 Psig Supply

1 Inch Valve

Port Size Inch (mm)	DFC Size 1069 Psig (kPa)
1/4 (6.4)	3,750 (25,855) ¹
3/8 (9.5)	3,750 (25,855) ¹
1/2 (12.7)	3,750 (25,855) ²
3/4 (19.1)	2,450 (16,892) ⁴

2 Inch Valve

Port Size Inch (mm)	DFC Size 2069 Psig (kPa)	DFC Size 2105 Psig (kPa)	DFC Size 2156 Psig (kPa)	DFC Size 3220 Psig (kPa)
1/4 (6.4)	6,250 (43,092) ²	6,250 (43,092) ¹	6,250 (43,092) ¹	-
3/8 (9.5)	6,250 (43,092) ²	6,250 (43,092) ¹	6,250 (43,092) ¹	-
1/2 (12.7)	5,750 (39,645) ⁴	6,250 (43,092) ³	6,250 (43,092) ³	-
3/4 (19.1)	2,400 (16,547) ⁴	4,100 (28,269) ⁵	6,250 (43,092) ⁶	-
1 (25.4)	1,325 (9,136) ⁴	2,685 (18,512) ⁷	3,900 (26,890) ⁶	5,850 (40,334) ⁷
1-1/4 (31.8)	820 (5,654) ⁴	1,689 (11,645) ⁷	2,474 (17,058) ⁶	3,655 (25,200) ⁷

NOTE - All the above actuator fail closed shut-off capabilities are Class IV. A higher shut-off may be achieved by using a higher bench set, contact your Dyna-Flo sales office for additional information.

Bench Set	Psi (kPa)
1	10 - 30 (69 - 207)
2	14 - 30 (97 - 207)
3	17 - 30 (117 - 207)
4	18 - 30 (124 - 207)
5	19 - 30 (131 - 207)
6	21 - 30 (145 - 207)
7	22 - 30 (152 - 207)

Model 2000 Control Valves



Table 19

Fail Open Actuator Maximum Shut-off Capabilities with 6 to 30 psig Signal, 35 Psig Supply

1 Inch Valve

Port Size Inch (mm)	DFO Size 1069 Psig (kPa)
1/4 (6.4)	3,750 (25,855) ¹
3/8 (9.5)	3,750 (25,855) ²
1/2 (12.7)	3,750 (25,855) ⁴
3/4 (19.1)	2,625 (18,099) ⁶

2 Inch Valve

Port Size Inch (mm)	DFO Size 2069 Psig (kPa)	DFO Size 2105 Psig (kPa)	DFO Size 2156 Psig (kPa)	DFO Size 3220 Psig (kPa)
1/4 (6.4)	6,250 (43,092) ²	6,250 (43,092) ²	6,250 (43,092) ³	—
3/8 (9.5)	6,250 (43,092) ⁴	6,250 (43,092) ³	6,250 (43,092) ³	—
1/2 (12.7)	3,750 (25,855) ⁴	6,250 (43,092) ³	6,250 (43,092) ³	—
3/4 (19.1)	1,950 (13,445) ⁴	4,100 (28,269) ⁶	5,700 (39,300) ⁵	6,250 (43,092) ⁶
1 (25.4)	1,050 (7,240) ⁴	2,285 (15,755) ⁶	3,300 (22,753) ⁵	5,020 (34,612) ⁶
1-1/4 (31.8)	650 (4,482) ⁴	1,425 (9,825) ⁶	2,090 (14,410) ⁵	3,175 (21,891) ⁶

NOTE - All the above actuator fail open shut-off capabilities are Class IV. A higher shut-off may be achieved by using a higher bench set, contact your Dyna-Flo sales office for additional information.

Bench Set	Psi (kPa)
1	6 - 26 (41 - 179)
2	6 - 22 (41 - 152)
3	6 - 19 (41 - 131)
4	6 - 18 (41 - 124)
5	6 - 15 (41 - 103)
6	6 - 14 (41 - 97)

Model 2000 Control Valves



Table 20

Port Size, Yoke Boss Diameter, Stem Diameters, and Rated Travel - Inch (mm)

Valve Size	Port Diameter Inch (mm)	Standard Inch (mm)			Optional Inch (mm)		
		Yoke Boss Diameter	Stem Diameter	Rated Travel	Yoke Boss Diameters	Stem Diameter	Rated Travel
1 Inch	1/4 (6.4)	2-1/8 (54)	3/8 (9.5)	3/4 (19)	2-13/16 (71)	1/2 (12.7)	3/4 (19.1)
	3/8 (9.5)						
	1/2 (12.7)						
	3/4 (19.1)						
2 Inch	1/4 (6.4)	2-13/16 (71)	1/2 (12.7)	3/4 (19)	3-9/16 (90)	3/4 (19)	3/4 (19.1)
	3/8 (9.5)						
	1/2 (12.7)						
	3/4 (19.1)						
	1 (25.4)						
	1-1/4 (31.8)						

Model 2000 Control Valves



Our Commitment to Quality

Dyna-Flo is committed to continuous improvement. While all efforts have been made to ensure the accuracy of the content in this document, modifications or improvements to the information, specifications, and designs may occur at any time without notice. This document was published for informational purposes only, and does not express or imply suitability, a warranty, or guarantee regarding the products or services described herein or their use or applicability.

Neither Dyna-Flo Control Valve Services Ltd., nor any of their affiliated entities assumes responsibility for the selection, use and maintenance of any product. Responsibility for selection, use and maintenance of any product remains with the purchaser and end-user.



Model 2000 Control Valves

MODEL NUMBERING SYSTEM

SAMPLE PART NUMBER: DF2000-2AFL-S2J2-E4

BODY STYLE					-	
-	GLOBE	A	ANGLE			
VALVE SIZE					2	
1	1 INCH	2	2 INCH			
ASME RATING					A	
A	150	B	300	C		600
D	900 / 1,500					
F	2,500	K	3" X 2" 150	H		3" X 2" 300
I	3" X 2" 600					
J	3" X 2" 900	G	3" X 2" 1,500	M		3" X 2" 2,500
Q	4" X 2" 150					
P	4" X 2" 300	L	4" X 2" 600	R	4" X 2" 900	
S	4" X 2" 1,500					
T	4" X 2" 2,500	E	3,750 PSI CWP (NPT)	N	6,250 PSI CWP (NPT)	
END CONNECTION					F	
F	RF	J	RTJ	N	NPT	
BODY MATERIAL					L	
L	LCC	M	CF8M			
TRIM					S	
S	S31600 / ALLOY 6	T	S31600 / TUNGSTEN CARBIDE			
PORT SIZE					2	
2	1/4"	3	3/8"	4	1/2"	
6	3/4"					
8	1"	1	1-1/4"			
PACKING STYLE					J	
J	DOUBLE PTFE V-RING (PRESSURE)		L		LIVE LOADED PTFE (PRESSURE)	
V	DOUBLE PTFE V-RING (VACUUM)		T		LIVE LOADED GRAPHITE (PRESSURE)	
R	DOUBLE PTFE V-RING (VACUUM / PRESSURE)		G		SINGLE GRAPHITE (PRESSURE)	
YOKE BOSS SIZE					2	
1	2-1/8" (3/8" STEM)	2	2-13/16" (1/2" STEM)	3	3-9/16" (3/4" STEM)	
PAINT					-	
-	DFPS-01 (STANDARD)			2	DFPS-02 (SEVERE SERVICE)	
3	DFPS-03 (HIGH TEMPERATURE)					
CHARACTERISTIC					E	
E	DYNA-FORM (EQUAL PERCENT) - FLOW UP					
F	DYNA-FLUTE 1 FLUTE (EQUAL PERCENT) - FLOW UP					
T	DYNA-FLUTE 3 FLUTE (EQUAL PERCENT) - FLOW UP					
D	DYNA-FORM (EQUAL PERCENT) - FLOW DOWN (ANGLE VALVE ONLY)					
1	DYNA-FLUTE 1 FLUTE (EQUAL PERCENT) - FLOW DOWN (ANGLE VALVE ONLY)					
3	DYNA-FLUTE 3 FLUTE (EQUAL PERCENT) - FLOW DOWN (ANGLE VALVE ONLY)					
SHUT-OFF CLASS					4	
4	CLASS IV	5	CLASS V			

DF2000